



BALANCED DOORS BALANCE SYSTEM

www.grupsa.com



BALANCE SYSTEM BS-900


The **Balanced Doors of the range Balance System** are an option for intense traffic, interior areas or exterior entrances with wind currents. Our AGB operator for balance doors holds the door under tension to ensure easy and elegant opening and secure closing for users.

In accordance with the strictest European safety regulations (EN 16005), the BS-900 model of balanced doors adapts to narrow entrances or corridors that require the maximum width of passage. It is made of aluminum, with multiple finishes to be customized to the aesthetics of the building.

In addition, they are prepared for power failures, as they optionally include a backup battery that guarantees operation even if they may temporarily lack power.

- Perfect for narrow corridors or entrances that need a wide passage width.
- Safety, reliability and low maintenance cost.
- Reinforced protection thanks to safety sensors and anti-pinch protection between door leaves.

BALANCED DOOR BS-900

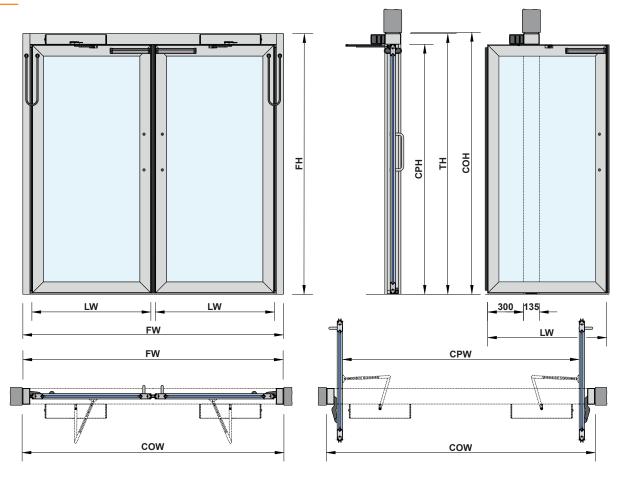

TECHNICAL SPECIFICATIONS

Tilt-and-turn opening	Single and double door leaves
Free passage height	1950-2600 mm
Clear passage width	700 - 1350 mm (single door leaf)
	1400 - 2800 mm (double door leaves)
Automatic opening	AGB Door Operator
Glazing	Laminated 4.4.1 mm
Optional	
Opening devices	Elbow push button
	Proximity sensor
	Opening sensor RS150-H
Opening and security sensors	Safety sensor GP-27
Lock	Electromagnetic
Locking System	Up to 9 interconnected doors
Dimensions / Design	Special on request
FINICHEO	



FINISHES

Aluminum

Silver anodizedLacquered RAL K7 210 colors

GRUPSA Door Systems

SPAIN I CHILE I PANAMA I MAGHREB I COLOMBIA I PORTUGAL I EQUATOR I U.A.E. PAKISTAN I COSTA RICA I INDIA I JORDAN I SAUDI ARABIA I GREECE I ROMANIA I VIETNAM To find out more, contact by email: trade@grupsa.com

